


SUS431 | Anonymized drawing excerpt

2,000 parts per batch / Turning, grinding and internal-bore inspection

SOURCE IDENTIFIERS, REVISIONS, DIMENSIONS AND TECHNICAL NOTES REMOVED

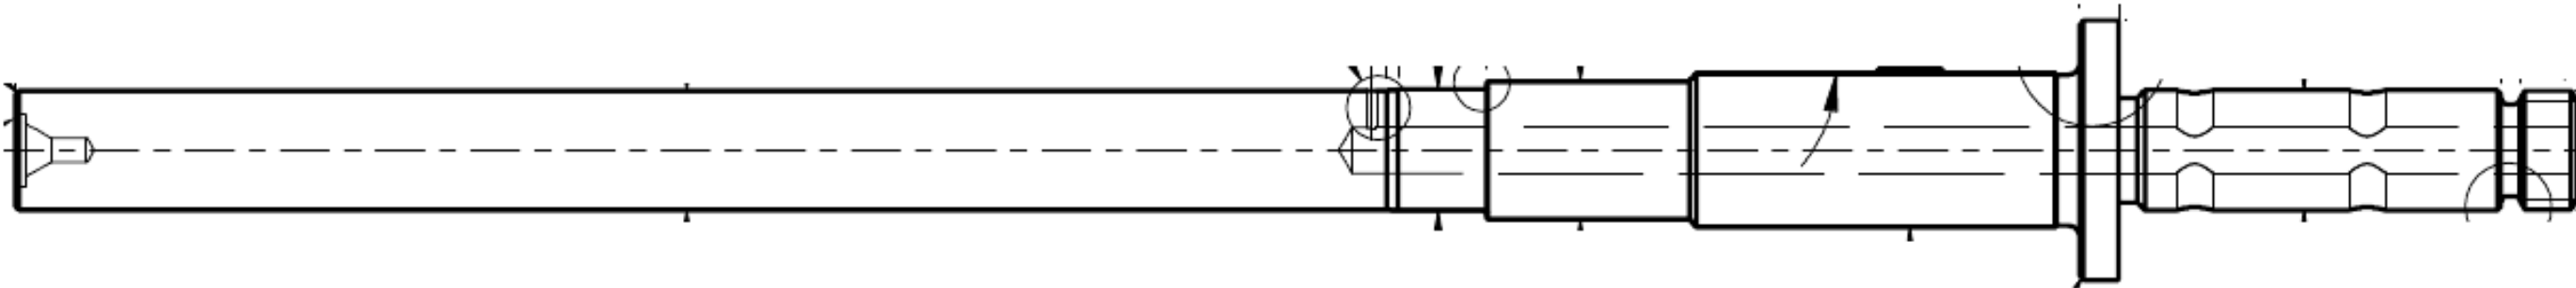

Only the main side-view geometry is retained. Detail views and all dimension callouts have been removed.

PUBLIC PROJECT CONTROLS

3 precision outside diameters

Cylindrical grinding
+0.005 mm process requirement

100% internal-bore inspection

Industrial borescope
After internal deburring

2,000 parts per batch

Green heat-number labels
Outside processing kept by batch

ORIGINAL TITLE BLOCK AND CUSTOMER / PART INFORMATION REMOVED

Original linework only. All source text and metadata are excluded from this new, flattened PDF.
The +0.005 mm process requirement is reported separately in the case study. No nominal dimensions are released here.
Case-study reference only. This excerpt is not a manufacturing or inspection release.